

DATA SHEET

8700 Series: Temperature-Stable Resonators

Applications

- Microwave filters
- LMDS
- High stability DROs
- Satellite communications
- Telemetry
- Automobile collision avoidance

Features

- High ϵ_r
- 100,000 $Q_u \times F$ product at 1 GHz
- Wide range of τ_f
- Frequency stability versus temperature
- Reduced size and weight
- High stability DRO design
- Ease of compensation for temperature drift
- Repeatability of design
- Negligible aging effects

Introduction

Trans-Tech, offers the 8700 series temperature-stable resonators, designed for use from 6 GHz to 40 GHz with excellent loss characteristics. The 8700 series offers a wide selection of temperature coefficients of resonant frequency for easier circuit compensation and a Quality factor (Q) greater than 10,000 at 10 GHz for high stability dielectric resonator oscillator (DRO) designs up to millimeter (mm) wave frequencies.


Table 1. Temperature Characteristics for Series D/C87

Type	Dielectric Constant	Temperature Coefficient of f_0 (τ_f) ± 2 (ppm/°C)	Q at 4.3 GHz
35	30.7 ± 1.0	+4	>22,000
34	30.4 ± 1.0	+2	
33	30 ± 1	0	
32	29 ± 1	-2	

Note: Contact us for custom τ_f and tolerances.

Table 2. Material Characteristics

Item	Value
Dielectric constant	29.0 to 30.7
Temperature coefficient of resonant frequency (τ_f) (ppm/°C)	-2 to +4
Q ($1/\tan \delta$) minimum	>10,000 at 10.0 GHz
Insulation resistance (Ω cm)	$\sim 10^{14}$
Thermal expansion (ppm/°C) (20°C – 200°C)	10
Thermal conductivity (cal/cm-sec °C) at 25°C	0.006
Specific heat (cal/g°C)	0.07
Density (g/cc)	>7.6
Water absorption	<0.01
Vicker hardness no. (kg/mm)	700
Flexural strength (PSI)	10,000
Composition	Ba, Zn, Ta-oxide (perovskite)
Color	Yellow



Trans-Tech products are compliant with all applicable legislation and are halogen-free.



For additional information, refer to *Trans-Tech's* document RFC-F0028, RFC-F0029, and RFC-F0022

DATA SHEET • 8700 SERIES: TEMPERATURE-STABLE RESONATORS

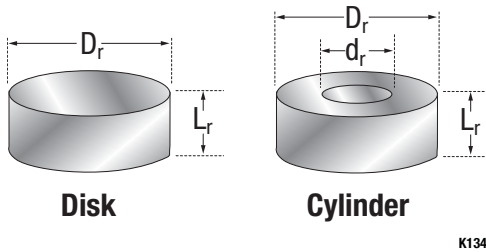


Figure 1. 8700 Disk and Cylinder

Table 3. Disk and Cylinder Ranges

Disk	Cylinder
<i>Diameter Range</i>	
Dr: 0.405 to 0.076 Lr: 35% to 45% of Dr dr: N/A	Dr: 0.405 to 0.245 Lr: 35% to 45% of Dr dr: 0.083
<i>Frequency Range</i>	
5550 to 32150	5550 to 9870

Note: Contact us for custom sizes.

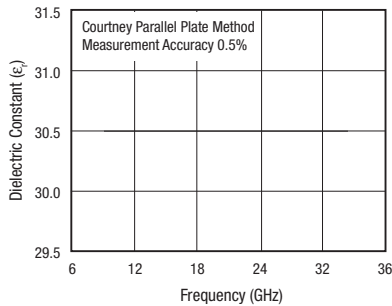


Figure 3. Typical (εr) vs Frequency

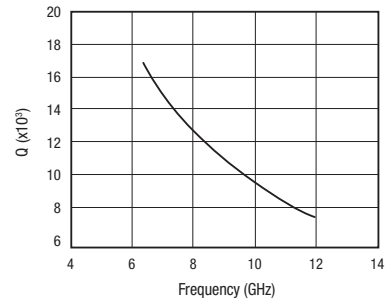


Figure 2. Typical Q vs Frequency

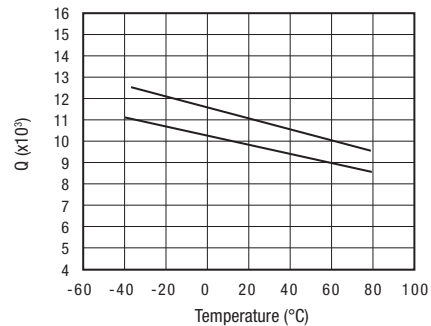


Figure 4. Typical Q vs Temperature @ 10 GHz

Copyright © 2013, 2017 Trans-Tech Inc., Inc. All Rights Reserved.

Information in this document is provided by Trans-Tech. These materials, including the information contained herein, are provided by Trans-Tech as a service to its customers and may be used for informational purposes only by the customer. Trans-Tech assumes no responsibility for errors or omissions in these materials or the information contained herein. Trans-Tech may change its documentation, products, services, specifications or product descriptions at any time, without notice. Trans-Tech makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Trans-Tech assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Trans-Tech products, information or materials, except as may be provided in Trans-Tech Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS, AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY, OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. TRANS-TECH DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS, OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. TRANS-TECH SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Trans-Tech products are not intended for use in medical, lifesaving, or life-sustaining applications, or other equipment in which the failure of the Trans-Tech products could lead to personal injury, death, or physical or environmental damage. Trans-Tech customers using or selling Trans-Tech products for use in such applications do so at their own risk and agree to fully indemnify Trans-Tech for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Trans-Tech products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Trans-Tech assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Trans-Tech products outside of stated published specifications or parameters.

Trans-Tech and the Trans-Tech symbol are trademarks or registered trademarks of Trans-Tech. in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.